




备注 NOTE
*本图纸施工前须经监理单位及监理单位部门审查合格方可用于施工。
*本图纸为中盛弘宇建设科技有限公司所有，未经许可，不得翻印、复制或用于其他用途。
*This drawing can only be used for construction after being examined to be qualified and approved by Drawing Approval Unit & Fire Control Committee. The copyright belongs to Zhongsheng Hongyu Construction Technology Co., Ltd. Without written permission, it's prohibited to use, change or copy the drawing for other purposes.

合作设计单位 CO-OPERATED WITH

说明 EXPLAIN

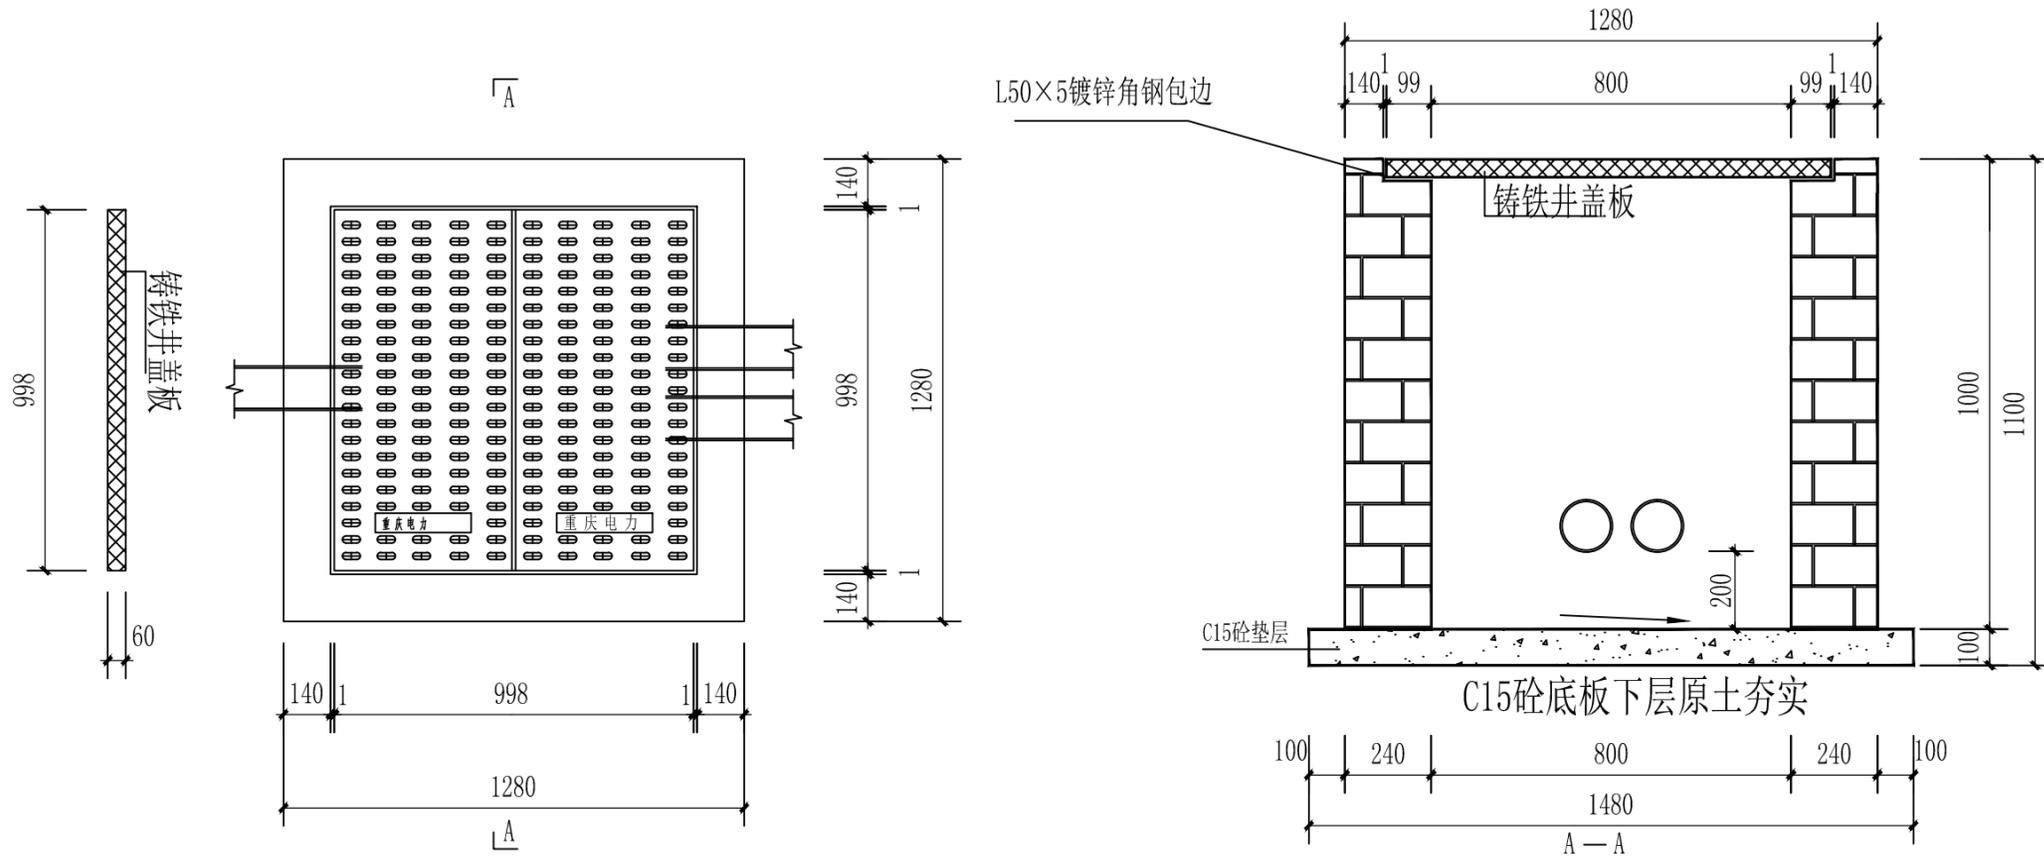

说明:

1. 本电缆井适用于配-华牧#01直线井。
2. 电缆井采用M7.5混合砂浆砌MU10页岩砖。
3. 铸铁井盖板（含井座）井压顶上，应保证支承处平整，形成整体受力，避免外力破坏。
4. 电缆井压顶需采用L50×5镀锌角钢包边。
5. 电缆保护管进入电缆井后，管口需与井壁齐平。
6. 电缆井承载力根据实际工程计算确定，铸铁井盖板选用厚度为5cm井盖板。
7. 电缆井井号牌固定安装于盖板旁。
8. 未说明处严格按照国家现行施工及验收规范执行。

审定 APPROVED BY	支永涛	支永涛
审核 VERIFIED BY	李亮	
项目负责人 PROJECT CHIEF	宋志荣	宋志荣
专业负责人 SPECIALIST CHIEF	支永涛	支永涛
校对 CHECKED BY	周兴	周兴
设计 DESIGNED BY	周浪	周浪

建设单位 CONSTRUCTION
重庆华牧现代农业有限公司

工程名称 PROJECT
华牧现代农业生态循环智能化养鸡项目配电工程

项目名称 SUB PROJECT

图纸名称 DRAWING TITLE
电缆排管工作井施工图（直线井）

工程编号 DRAWING NO.			
阶段 STAGE	施工图	专业 DISCIPLINE	电气
比例 SCALE	1:1	图号 DRAWING NO.	
日期 DATE	2023.04	版本号 VERSION NUMBER	A